

Elektrofüzyon Ek Parçaları

Electrofusion Fittings



İşaretler Sözlüğü / Signs Glossary / علامة اختصار

Uzunluk ölçüleri için tolerans ± 10 mm dir.

For length measurements the tolerance is ± 10 mm.

التسامح في القياس الطول ± 10 مم

EF Manşon

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Coupler

EF Coupleur

ЭЛ. СВАРНАЯ МУФТА

وصلة

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

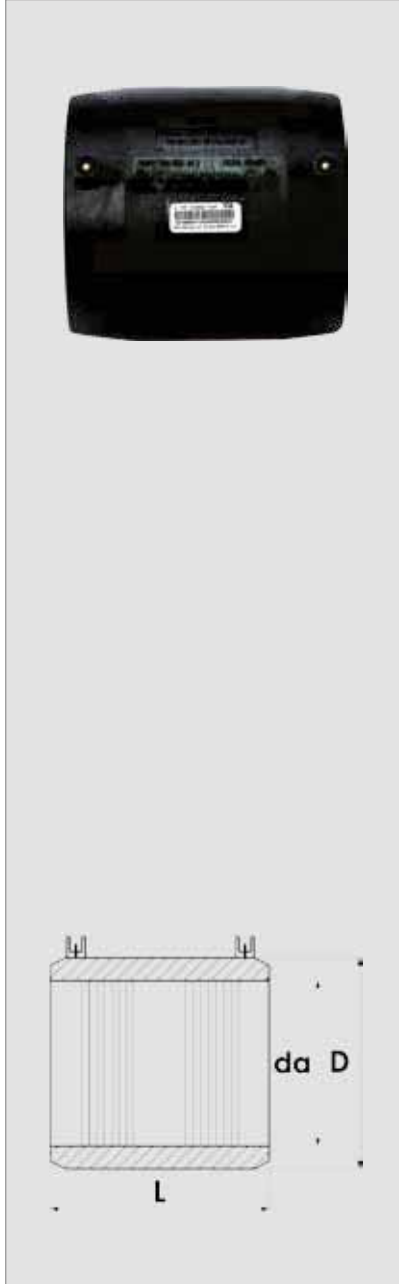

Çap	Basınç	Kod No	D	L	Net Ağırlık (kg)
Size (mm)	Pressure(Bar)	Code No	(mm)	(mm)	Weight (kg)
d					
20	PN 10-PN 16	2 04 01 16 0020-000	31	68	0,031
25	PN 10-PN 16	2 04 01 16 0025-000	36	71	0,039
32	PN 10-PN 16 PN 20	2 04 01 16 0032-000	43	72	0,052
40	PN 10-PN 16 PN 20	2 04 01 16 0040-000	53	80	0,075
50	PN 10-PN 16 PN 20	2 04 01 16 0050-000	65	87	0,114
63	PN 10-PN 16 PN 20	2 04 01 16 0063-000	80	95	0,170
75	PN 10-PN 16 PN 20	2 04 01 16 0075-000	95	110	0,256
90	PN 10-PN 16	2 04 01 16 0090-000	110	122	0,385
	PN 20-PN 25	2 04 01 25 0090-000	110	125	0,542
110	PN 10-PN 16	2 04 01 16 0110-000	133	143	0,555
	PN 20-PN 25	2 04 01 25 0110-000	135	145	0,842
125	PN 10-PN 16	2 04 01 16 0125-000	152	157	0,790
	PN 20-PN 25	2 04 01 25 0125-000	145	155	1,054
140	PN 10-PN 16	2 04 01 16 0140-000	163	165	0,890
	PN 20-PN 25	2 04 01 25 0140-000	165	160	1,394
160	PN 10-PN 16	2 04 01 16 0160-000	195	175	1,360
	PN 20-PN 25	2 04 01 25 0160-000	190	185	1,944
180	PN 10-PN 16	2 04 01 16 0180-000	218	192	1,850
	PN 20-PN 25	2 04 01 25 0180-000	235	200	3,808
200	PN 10-PN 16	2 04 01 16 0200-000	245	206	2,900
	PN 20-PN 25	2 04 01 25 0200-000	270	220	5,750
225	PN 10-PN 16	2 04 01 16 0225-000	273	222	3,700
	PN 20-PN 25	2 04 01 25 0225-000	302	244	6,900
250	PN 10-PN 16	2 04 01 16 0250-000	302	244	4,400
	PN 20-PN 25	2 04 01 25 0250-000	350	250	10,075
280	PN 10-PN 16	2 04 01 16 0280-000	350	250	6,450
	PN 20-PN 25	2 04 01 25 0280-000	380	258	12,050
315	PN 10-PN 16	2 04 01 16 0315-000	380	265	8,000
	PN 20-PN 25	2 04 01 25 0315-000	425	250	14,650

**450-500-560-630-710-800 çaplar PN 20 - PN 25 basınç sınıfına göre özel üretilmektedir.
The dimeters of 450-500-560-630-710-800 PN 20 - PN 25 can be produced according to your order.

**180-500 çap aralığındaki ürünler PN 32 basınç sınıfında özel üretilmektedir.
Products with diameters ranging between 180 and 500 are produced specially for PN 32.

EF Manşon

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Coupler


EF Coupleur

ЭЛ. СВАРНАЯ МУФТА

وصلة

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	D	L	Net Ağırlık (kg)
Size (mm)	Pressure(Bar)	Code No	(mm)	(mm)	Weight (kg)
d					
355	PN 10	2 04 01 10 0355-000	410	258	8,000
	PN 16	2 04 01 16 0355-000	428	258	10,333
	PN 20-PN 25	2 04 01 25 0355-000	489	261	21,150
400	PN 10	2 04 01 10 0400-000	460	261	10,000
	PN 16	2 04 01 16 0400-000	490	261	13,715
	PN 20-PN 25	2 04 01 25 0400-000	557	323	32,900
450	PN 10	2 04 01 10 0450-000	510	323	16,000
	PN 16	2 04 01 16 0450-000	557	323	22,941
500	PN 10	2 04 01 10 0500-000	570	350	21,000
	PN 16	2 04 01 16 0500-000	615	350	29,258
560	PN 10	2 04 01 10 0560-000	640	350	24,600
	PN 16	2 04 01 16 0560-000	685	350	38,360
630	PN 10	2 04 01 10 0630-000	720	360	29,500
	PN 16	2 04 01 16 0630-000	780	360	54,300
710	PN 10	2 04 01 10 0710-000	810	380	38,500
	PN 16	2 04 01 16 0710-000	880	380	68,500
800	PN 10	2 04 01 10 0800-000	910	400	60,000
	PN 16	2 04 01 16 0800-000	980	400	89,000
900	PN 10	2 04 01 10 0900-000	1025	450	80,000
	PN 16	2 04 01 16 0900-000	1105	450	130,000
1000	PN 10	2 04 01 10 1000-000	1140	500	111,500
	PN 16	2 04 01 16 1000-000	1225	500	165,000
1200	PN 10	2 04 01 10 1200-000	1370	500	161,000
	PN 16	2 04 01 16 1200-000	1450	500	245,000
1400	PN 10	2 04 01 10 1400-000	1600	550	243,000
	PN 16	2 04 01 16 1400-000	1700	550	380,000
1600	PN 10	2 04 01 10 1600-000	1830	575	336,000
	PN 16	2 04 01 16 1600-000	1900	575	448,000



**450-500-560-630-710-800 çaplar PN 20 - PN 25 basınç sınıfına göre özel üretilmektedir.

The dimeters of 450-500-560-630-710-800 PN 20 - PN 25 can be produced according to your order.

**180-500 çap aralığındaki ürünler PN 32 basınç sınıfında özel üretilmektedir.

Products with diameters ranging between 180 and 500 are produced specially for PN 32.

EF Dirsek 45°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Elbow 45°

EF Coude 45°

ЭЛ. СВАРНОЙ ОТВОД 45°

كوع لحام كهربي 45°

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	d1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d							
*32	PN 10-PN 16	2 04 02 16 0032-000	44	119	32	87	0,154
40	PN 10-PN 16	2 04 02 16 0040-000	54	52	42	10	0,105
50	PN 10-PN 16	2 04 02 16 0050-000	67	58	45	13	0,170
63	PN 10-PN 16	2 04 02 16 0063-000	81	67	49	18	0,245
75	PN 10-PN 16	2 04 02 16 0075-000	94	83	62	21	0,433
90	PN 10-PN 16	2 04 02 16 0090-000	114	90	64	26	0,655
110	PN 10-PN 16	2 04 02 16 0110-000	138	108	78	30	1,155
125	PN 10-PN 16	2 04 02 16 0125-000	153	109	77	32	1,255
*140	PN 10-PN 16	2 04 02 16 0140-000	163	213	83	130	3,205
160	PN 10-PN 16	2 04 02 16 0160-000	195	130	92	38	2,425
180	PN 10-PN 16	2 04 02 16 0180-000	243	154	96	58	5,300
200	PN 10-PN 16	2 04 02 16 0200-000	243	154	104	50	4,400
225	PN 10-PN 16	2 04 02 16 0225-000	270	178	115	63	5,900
*250	PN 10	2 04 02 10 0250-000	302	332	122	210	13,993
	PN 16	2 04 02 16 0250-000	302	332	122	210	15,920
*280	PN 10	2 04 02 10 0280-000	350	345	125	220	19,826
	PN 16	2 04 02 16 0280-000	350	345	125	220	22,665
*315	PN 10	2 04 02 10 0315-000	380	373	133	240	25,895
	PN 16	2 04 02 16 0315-000	380	373	133	240	28,585
*355	PN 10	2 04 02 10 0355-000	410	360	129	231	26,780
	PN 16	2 04 02 16 0355-000	425	360	129	231	36,046
*400	PN 10	2 04 02 10 0400-000	460	384	131	253	35,210
	PN 16	2 04 02 16 0400-000	490	384	131	253	49,060
*450	PN 10	2 04 02 10 0450-000	510	471	162	309	55,060
	PN 16	2 04 02 16 0450-000	555	471	162	309	78,882
*500	PN 10	2 04 02 10 0500-000	570	509	175	334	73,080
	PN 16	2 04 02 16 0500-000	615	509	175	334	102,516
*560	PN 10	2 04 02 10 0560-000	640	441	175	266	80,940
	PN 16	2 04 02 16 0560-000	685	441	175	266	121,760
*630	PN 10	2 04 02 10 0630-000	720	460	180	280	101,240
	PN 16	2 04 02 16 0630-000	780	460	180	280	168,700

*İşareti olan ürünler KİT'tir./ *The marked products are KIT.

EF Dirsek 90°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Elbow 90°

EF Coude 90°

ЭЛ. СВАРНОЙ ОТВОД 90°

كوع لحام كهربي 90

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1


Çap	Basınç	Kod No	d1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d							
20	PN 10-PN 16	2 04 03 16 0020-000	31	44	34	10	0,042
25	PN 10-PN 16	2 04 03 16 0025-000	36	48	34	14	0,054
32	PN 10-PN 16	2 04 03 16 0032-000	45	53	35	18	0,070
40	PN 10-PN 16	2 04 03 16 0040-000	55	61	39	22	0,118
50	PN 10-PN 16	2 04 03 16 0050-000	67	70	42	28	0,172
63	PN 10-PN 16	2 04 03 16 0063-000	81	80	46	34	0,276
75	PN 10-PN 16	2 04 03 16 0075-000	95	100	61	39	0,475
90	PN 10-PN 16	2 04 03 16 0090-000	113	120	63	57	0,800
110	PN 10-PN 16	2 04 03 16 0110-000	137	143	80	63	1,345
125	PN 10-PN 16	2 04 03 16 0125-000	152	140	77	63	1,520
*140	PN 10	2 04 03 10 0140-000	163	278	83	195	3,240
	PN 16	2 04 03 16 0140-000	163	278	83	195	3,778
160	PN 10-PN 16	2 04 03 16 0160-000	195	171	93	78	2,920
180	PN 10-PN 16	2 04 03 16 0180-000	243	215	96	119	6,100
200	PN 10-PN 16	2 04 03 16 0200-000	243	215	104	111	5,100
225	PN 10-PN 16	2 04 03 16 0225-000	270	248	115	133	7,000
*250	PN 10	2 04 03 10 0250-000	302	412	122	290	15,570
	PN 16	2 04 03 16 0250-000	302	412	122	290	17,960
*280	PN 10	2 04 03 10 0280-090	350	425	125	300	21,720
	PN 16	2 04 03 16 0280-090	350	425	125	300	25,218
*315	PN 10	2 04 03 10 0315-090	380	468	133	335	29,415
	PN 16	2 04 03 16 0315-090	380	468	133	335	34,256
*355	PN 10	2 04 03 10 0355-090	410	474	129	345	31,880
	PN 16	2 04 03 16 0355-090	425	474	129	345	42,377
*400	PN 10	2 04 03 10 0400-090	460	501	131	370	41,005
	PN 16	2 04 03 16 0400-090	490	501	131	370	57,605
*450	PN 10	2 04 03 10 0450-090	510	607	162	445	62,960
	PN 16	2 04 03 16 0450-090	555	607	162	445	89,762
*500	PN 10	2 04 03 10 0500-090	570	660	175	485	84,180
	PN 16	2 04 03 16 0500-090	615	660	175	485	117,516
*560	PN 10	2 04 03 10 0560-090	640	968	175	793	126,468
	PN 16	2 04 03 16 0560-090	685	968	175	793	190,648
*630	PN 10	2 04 03 10 0630-090	720	1008	180	828	160,810
	PN 16	2 04 03 16 0630-090	780	1008	180	828	258,234



ORJ.



KİT

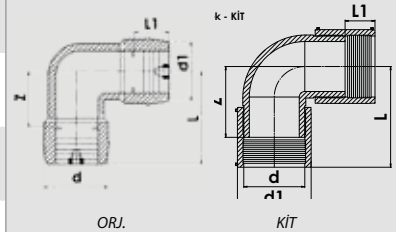

*İşareti olan ürünler KİT'tir. / *The marked products are KİT.

EF Eşit TE 90°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Equal TEE 90°

EF TE Egale 90°

ЭЛ. СВАРНОЙ РАВНОПРОХОДНОЙ ТРОЙНИК 90°

متساوي تي لحام كهربائي 90

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	d1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d							
*20	PN 10-PN 16	2 04 04 16 0020-000	31	213	50	75	0,097
*25	PN 10-PN 16	2 04 04 16 0025-000	36	226	50	80	0,126
32	PN 10-PN 16	2 04 04 16 0032-000	43	103	40	67	0,087
40	PN 10-PN 16	2 04 04 16 0040-000	54	120	46	77	0,140
50	PN 10-PN 16	2 04 04 16 0050-000	65	135	49	87	0,220
63	PN 10-PN 16	2 04 04 16 0063-000	78	150	55	100	0,323
75	PN 10-PN 16	2 04 04 16 0075-000	92	183	66	120	0,565
90	PN 10-PN 16	2 04 04 16 0090-000	110	201	76	140	0,865
110	PN 10-PN 16	2 04 04 16 0110-000	135	251	85	161	1,550
125	PN 10-PN 16	2 04 04 16 0125-000	151	253	88	173	1,870
140	PN 10 - PN 16	2 04 04 16 0140-000	170	283	98	187	2,300
160	PN 10-PN 16	2 04 04 16 0160-000	193	322	98	205	3,695
*180	PN 10-PN 16	2 04 04 16 0180-000	211	606	105	225	7,690
*200	PN 10-PN 16	2 04 04 16 0200-000	230	655	115	250	10,110
*225	PN 10-PN 16	2 04 04 16 0225-000	256	658	116	253	12,100
*250	PN 10	2 04 04 10 0250-000	302	794	130	275	17,795
	PN 16	2 04 04 16 0250-000	302	794	130	275	20,090
*280	PN 10	2 04 04 10 0280-000	350	840	145	290	24,420
	PN 16	2 04 04 16 0280-000	350	840	145	290	27,905
*315	PN 10	2 04 04 10 0315-000	380	935	155	325	33,285
	PN 16	2 04 04 16 0315-000	380	935	155	325	38,400
*355	PN 10	2 04 04 10 0355-000	410	988	155	360	37,807
	PN 16	2 04 04 16 0355-000	410	988	155	360	45,785
*400	PN 10	2 04 04 10 0400-000	460	1050	155	395	50,550
	PN 16	2 04 04 16 0400-000	490	1045	155	395	68,940
*450	PN 10	2 04 04 10 0450-000	510	1213	175	445	76,000
	PN 16	2 04 04 16 0450-000	555	1213	175	445	107,882
*500	PN 10	2 04 04 10 0500-000	570	1350	250	500	91,356
	PN 16	2 04 04 16 0500-000	615	1350	250	500	130,895
*560	PN 10	2 04 04 10 0560-000	640	1410	250	530	113,424
	PN 16	2 04 04 16 0560-000	685	1410	250	530	170,994
*630	PN 10	2 04 04 10 0630-000	720	1490	250	565	143,988
	PN 16	2 04 04 16 0630-000	780	1490	250	565	232,867

*İşareti olan ürünler KİT'tir./ *The marked products are KIT.
2 tarafı ayrı ayrı kaynaklılabılır. / 2 side seperate fusion zone.



EF İnegal TE 90°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Reduced TEE 90°

EF TE Réduite 90°

ЭЛ. СВАРНОЙ НЕ РАВНОПРОХОДНОЙ ТРОЙНИК 90°

مخفض تي لحام كهربي 90 موزع

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	d1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d-d2							
*25-20	PN 10-PN 16	2 04 05 16 0025-020	36	226	35	110	0,131
*32-20	PN 10-PN 16	2 04 05 16 0032-020	43	237	35	105	0,179
*32-25	PN 10-PN 16	2 04 05 16 0032-025	43	237	55	80	0,174
40-20	PN 10-PN 16	2 04 05 16 0040-020	53	120	35	67	0,135
40-25	PN 10-PN 16	2 04 05 16 0040-025	53	120	39	71	0,138
40-32	PN 10-PN 16	2 04 05 16 0040-032	53	120	45	77	0,140
50-20	PN 10-PN 16	2 04 05 16 0050-020	64	134	35	73	0,208
50-25	PN 10-PN 16	2 04 05 16 0050-025	64	134	39	77	0,214
50-32	PN 10-PN 16	2 04 05 16 0050-032	64	134	43	81	0,218
50-40	PN 10-PN 16	2 04 05 16 0050-040	64	134	48	86	0,220
63-20	PN 10-PN 16	2 04 05 16 0063-020	79	134	37	87	0,262
63-25	PN 10-PN 16	2 04 05 16 0063-025	79	134	40	90	0,267
63-32	PN 10-PN 16	2 04 05 16 0063-032	78	135	46	95	0,265
63-40	PN 10-PN 16	2 04 05 16 0063-040	77	134	55	100	0,250
63-50	PN 10-PN 16	2 04 05 16 0063-050	78	151	54	98	0,330
75-32	PN 10-PN 16	2 04 05 16 0075-032	92	185	45	100	0,520
75-40	PN 10 - PN 16	2 04 05 16 0075-040	92	185	45	100	0,540
75-50	PN 10-PN 16	2 04 05 16 0075-050	92	185	45	100	0,535
*75-63	PN 10-PN 16	2 04 05 16 0075-063	95	375	60	115	1,040
90-20	PN 10-PN 16	2 04 05 16 0090-020	115	193	60	120	0,640
90-25	PN 10-PN 16	2 04 05 16 0090-025	115	193	63	124	0,645
90-32	PN 10-PN 16	2 04 05 16 0090-032	115	193	65	126	0,655
90-40	PN 10-PN 16	2 04 05 16 0090-040	115	193	67	128	0,670
90-50	PN 10-PN 16	2 04 05 16 0090-050	115	193	67	128	0,700
90-63	PN 10-PN 16	2 04 05 16 0090-063	115	193	67	128	0,730
90-75	PN 10-PN 16	2 04 05 16 0090-075	115	193	67	128	0,750
*110-20	PN 10-PN 16	2 04 05 16 0110-020	133	393	35	150	1,959
*110-25	PN 10-PN 16	2 04 05 16 0110-025	133	393	55	125	1,954
*110-32	PN 10-PN 16	2 04 05 16 0110-032	133	393	60	135	1,962
110-40	PN 10-PN 16	2 04 05 16 0110-040	139	227	68	143	1,260
110-50	PN 10-PN 16	2 04 05 16 0110-050	137	225	67	149	1,267
110-63	PN 10-PN 16	2 04 05 16 0110-063	135	225	66	147	1,270
*110-75	PN 10-PN 16	2 04 05 16 0110-075	133	459	70	142	2,250
110-90	PN 10-PN 16	2 04 05 16 0110-090	137	253	84	162	1,600




ORJ.



KIT



Ø180 Ø200 Ø225

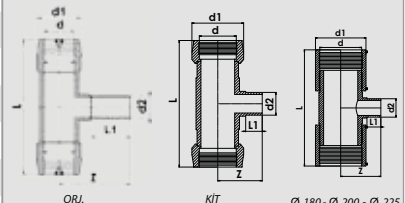

*İşareti olan ürünler KİT'tir. / *The marked products are KIT.
2 tarafı ayrı ayrı kaynatılabilir. / 2 side separate fusion zone.

EF İnegal TE 90°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Reduced TEE 90°

EF TE Réduite 90°

ЭЛ. СВАРНОЙ НЕ РАВНОПРОХОДНОЙ ТРОЙНИК 90°

مخفض تي لحام كهربي 90 موزع

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	d1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d-d2							
*125-50	PN 10-PN 16	2 04 05 16 0125-050	152	517	45	167	3,272
*125-63	PN 10-PN 16	2 04 05 16 0125-063	152	517	60	140	3,220
*125-75	PN 10-PN 16	2 04 05 16 0125-075	152	517	65	202	3,389
125-90	PN 10-PN 16	2 04 05 16 0125-090	151	255	86	175	1,896
125-110	PN 10-PN 16	2 04 05 16 0125-110	151	255	86	171	1,900
140-90	PN 10-PN 16	2 04 05 16 0140-090	170	283	85	174	2,000
140-110	PN 10-PN 16	2 04 05 16 0140-110	170	283	85	174	2,100
140-125	PN 10-PN 16	2 04 05 16 0140-125	170	283	95	184	2,200
160-50	PN 10-PN 16	2 04 05 16 0160-050	195	275	61	187	2,600
160-63	PN 10-PN 16	2 04 05 16 0160-063	195	275	61	187	2,655
*160-75	PN 10-PN 16	2 04 05 16 0160-075	195	495	70	165	5,075
160-90	PN 10-PN 16	2 04 05 16 0160-090	195	275	84	197	2,720
160-110	PN 10-PN 16	2 04 05 16 0160-110	195	277	85	196	2,555
160-125	PN 10-PN 16	2 04 05 16 0160-125	195	280	90	205	2,830
160-140	PN 10-PN 16	2 04 05 16 0160-140	195	280	90	205	2,900
*180-90	PN 10-PN 16	2 04 05 16 0180-090	211	606	95	455	6,648
*180-110	PN 10-PN 16	2 04 05 16 0180-110	211	606	99	455	6,865
*180-125	PN 10-PN 16	2 04 05 16 0180-125	211	606	100	455	6,800
*180-160	PN 10-PN 16	2 04 05 16 0180-160	211	606	105	455	7,000
*200-63	PN 10-PN 16	2 04 05 16 0200-063	230	655	63	495	8,790
*200-75	PN 10-PN 16	2 04 05 16 0200-075	230	655	78	495	9,100
*200-90	PN 10-PN 16	2 04 05 16 0200-090	230	655	80	495	9,137
*200-110	PN 10-PN 16	2 04 05 16 0200-110	230	655	82	495	9,180
*200-125	PN 10-PN 16	2 04 05 16 0200-125	230	655	95	495	9,150
*200-140	PN 10-PN 16	2 04 05 16 0200-140	230	655	98	495	9,500
*200-160	PN 10-PN 16	2 04 05 16 0200-160	230	655	102	495	9,680
*200-180	PN 10-PN 16	2 04 05 16 0200-180	230	655	110	495	10,162
*225-110	PN 10-PN 16	2 04 05 16 0225-110	256	658	85	515	10,621
*225-160	PN 10-PN 16	2 04 05 16 0225-160	256	658	100	515	11,157
*225-200	PN 10-PN 16	2 04 05 16 0225-200	256	658	110	515	11,600

*İşareti olan ürünler KİT'tir. / *The marked products are KIT.
2 tarafı ayrı ayrı kaynatılabilir. / 2 side separate fusion zone.

EF İnegal TE 90°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Reduced TEE 90°

EF TE Réduite 90°

ЭЛ. СВАРНОЙ НЕ РАВНОПРОХОДНОЙ ТРОЙНИК 90°


مخفض تي لحام كهربائي 90 موزع

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	d1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d-d2							
*250-90	PN 10	2 04 05 10 0250-090	302	669	82	220	14,400
	PN 16	2 04 05 16 0250-090	302	669	82	220	17,050
*250-110	PN 10	2 04 05 10 0250-110	302	694	83	240	14,270
	PN 16	2 04 05 16 0250-110	302	694	83	240	16,610
*250-125	PN 10	2 04 05 10 0250-125	302	699	97	260	14,600
	PN 16	2 04 05 16 0250-125	302	699	97	260	17,050
*250-140	PN 10	2 04 05 10 0250-140	302	694	93	240	14,330
	PN 16	2 04 05 16 0250-140	302	699	85	320	17,276
*250-160	PN 10	2 04 05 10 0250-160	302	694	100	260	14,530
	PN 16	2 04 05 16 0250-160	302	694	100	260	17,020
*250-180	PN 10	2 04 05 10 0250-180	302	799	90	295	17,401
	PN 16	2 04 05 16 0250-180	302	799	95	305	19,711
*280-110	PN 10	2 04 05 10 0280-110	350	720	85	250	20,980
	PN 16	2 04 05 16 0280-110	350	710	85	250	23,765
*280-125	PN 10	2 04 05 10 0280-125	350	710	80	295	23,078
	PN 16	2 04 05 16 0280-125	350	710	80	300	24,175
*280-160	PN 10	2 04 05 10 0280-160	350	710	98	260	22,960
	PN 16	2 04 05 16 0280-160	350	710	98	260	24,035
*315-90	PN 10	2 04 05 10 0315-090	380	775	87	304	26,442
	PN 16	2 04 05 16 0315-090	380	775	80	302	30,041
*315-110	PN 10	2 04 05 10 0315-110	380	775	80	265	26,345
	PN 16	2 04 05 16 0315-110	380	775	80	265	29,907
*315-125	PN 10	2 04 05 10 0315-125	380	775	80	312	26,381
	PN 16	2 04 05 16 0315-125	380	775	80	312	30,777
*315-160	PN 10	2 04 05 10 0315-160	380	775	100	290	26,150
	PN 16	2 04 05 16 0315-160	380	780	100	295	30,650
*315-180	PN 10	2 04 05 10 0315-180	380	775	90	327	26,820
	PN 16	2 04 05 16 0315-180	380	775	95	337	31,117
*315-200	PN 10	2 04 05 10 0315-200	380	775	120	310	26,600
	PN 16	2 04 05 16 0315-200	380	775	120	305	30,750
*315-225	PN 10	2 04 05 10 0315-225	380	935	110	315	30,600
	PN 16	2 04 05 16 0315-225	380	930	125	392	37,063
*315-250	PN 10	2 04 05 10 0315-250	380	930	125	315	31,485
	PN 16	2 04 05 16 0315-250	380	930	125	315	36,070



KİT



KİT

*İşareti olan ürünler KİT'tir. / *The marked products are KIT.
2 tarafı ayrı ayrı kaynakılabilir. / 2 side separate fusion zone.

EF İnegal TE 90°

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Reduced TEE 90°

EF TE Réduite 90°

ЭЛ. СВАРНОЙ НЕ РАВНОПРОХОДНОЙ ТРОЙНИК 90°

مخفض تي لحام كهربي 90 موزع

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

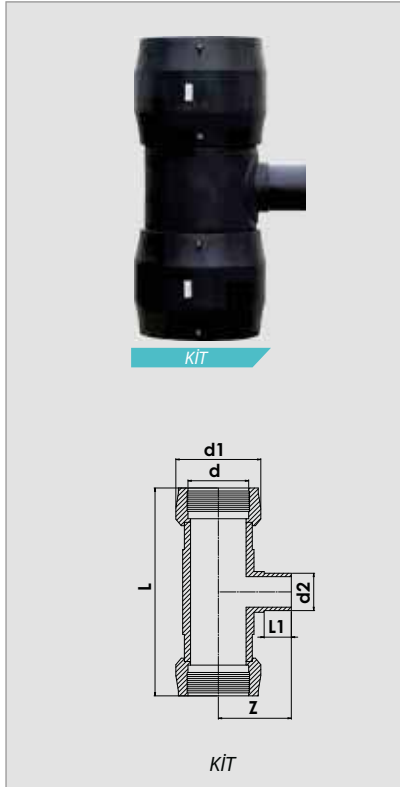

Çap	Basınç	Kod No	d1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d-d2							
*355-110	PN 10	2 04 05 10 0355-110	410	688	85	290	26,900
	PN 16	2 04 05 16 0355-110	428	688	85	290	35,506
*355-125	PN 10	2 04 05 10 0355-125	410	688	80	332	27,439
	PN 16	2 04 05 16 0355-125	428	688	80	337	36,290
*355-250	PN 10	2 04 05 10 0355-250	410	838	150	327	31,500
	PN 16	2 04 05 16 0355-250	428	838	150	327	42,266
*400-250	PN 10	2 04 05 10 0400-250	460	891	150	350	40,500
	PN 16	2 04 05 16 0400-250	489	891	150	350	56,130
*450-90	PN 10	2 04 05 10 0450-090	510	1213	85	830	79,505
	PN 16	2 04 05 16 0450-090	557	1213	85	810	110,534
*450-125	PN 10	2 04 05 10 0450-125	510	1213	95	785	79,408
	PN 16	2 04 05 16 0450-125	557	1213	85	745	110,526
*450-180	PN 10	2 04 05 10 0450-180	510	1213	90	755	79,502
	PN 16	2 04 05 16 0450-180	557	1213	90	735	110,829
*450-225	PN 10	2 04 05 10 0450-225	510	1213	115	770	80,807
	PN 16	2 04 05 16 0450-225	557	1213	115	795	121,535
*450-315	PN 10	2 04 05 10 0450-315	510	1213	130	670	80,021
	PN 16	2 04 05 16 0450-315	557	1213	140	705	114,685

*İşareti olan ürünler KİT'tir. / *The marked products are KIT.
2 tarafı ayrı ayrı kaynatılabilir. / 2 side seperate fusion zone.



EF Redüksiyon

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Reducer

EF Réduction

ЭЛ. СВАРНОЙ ПЕРЕХОДНИК

مخفض ربط لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1


Çap	Basınç	Kod No	d1	L	L1	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	(mm)	(mm)	Weight (kg)
d - d2						
*25-20	PN 10-PN 16	2 04 06 16 0025-020	36	150	76	0,084
*32-20	PN 10-PN 16	2 04 06 16 0032-020	43	180	86	0,111
*32-25	PN 10-PN 16	2 04 06 16 0032-025	43	187	91	0,121
*40-20	PN 10-PN 16	2 04 06 16 0040-020	53	179	85	0,136
*40-25	PN 10-PN 16	2 04 06 16 0040-025	53	181	85	0,146
*40-32	PN 10-PN 16	2 04 06 16 0040-032	53	181	85	0,162
*50-25	PN 10-PN 16	2 04 06 16 0050-025	65	189	89	0,199
*50-32	PN 10-PN 16	2 04 06 16 0050-032	65	195	89	0,221
*50-40	PN 10-PN 16	2 04 06 16 0050-040	65	224	114	0,277
*63-20	PN 10-PN 16	2 04 06 16 0063-020	80	200	98	0,273
*63-25	PN 10-PN 16	2 04 06 16 0063-025	80	203	98	0,303
63-32	PN 10-PN 16	2 04 06 16 0063-032	78	106	55	0,155
63-40	PN 10-PN 16	2 04 06 16 0063-040	78	107	51	0,165
*63-50	PN 10-PN 16	2 04 06 16 0063-050	80	206	98	0,382
*75-20	PN 10-PN 16	2 04 06 16 0075-020	95	303	123	0,477
*75-25	PN 10-PN 16	2 04 06 16 0075-025	95	305	123	0,486
*75-32	PN 10-PN 16	2 04 06 16 0075-032	95	250	123	0,485
*75-40	PN 10-PN 16	2 04 06 16 0075-040	95	250	125	0,522
*75-50	PN 10-PN 16	2 04 06 16 0075-050	95	264	125	0,579
*75-63	PN 10-PN 16	2 04 06 16 0075-63	95	263	120	0,660
*90-32	PN 10-PN 16	2 04 06 16 0090-032	110	282	136	0,672
*90-40	PN 10-PN 16	2 04 06 16 0090-040	110	341	141	0,775
*90-50	PN 10-PN 16	2 04 06 16 0090-050	110	285	141	0,779
90-63	PN 10-PN 16	2 04 06 16 0090-063	116	146	66	0,350
90-75	PN 10-PN 16	2 04 06 16 0090-075	116	146	66	0,400
*110-50	PN 10	2 04 06 10 0110-050	133	305	162	0,989
	PN 16	2 04 06 16 0110-050	133	305	162	1,071
110-63	PN 10-PN 16	2 04 06 16 0110-063	135	161	77	0,602
*110-75	PN 10	2 04 06 10 0110-075	133	372	157	1,332
	PN 16	2 04 06 16 0110-075	133	322	162	1,315
110-90	PN 10-PN 16	2 04 06 16 0110-090	141	170	80	0,750



ORJ.



KIT

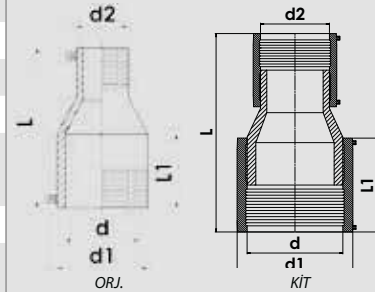

*İşareti olan ürünler KİT'tir. / *The marked products are KIT.

EF Redüksiyon

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Reducer

EF Réduction

ЭЛ. СВАРНОЙ ПЕРЕХОДНИК

مخفض ربط لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	d1	L	L1	Net Ağırlık(kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	(mm)	(mm)	Weight (kg)
d - d2						
*125-50	PN 10	2 04 06 10 0125-050	152	395	169	1,435
	PN 16	2 04 06 16 0125-050	152	377	169	1,493
125-63	PN 10-PN 16	2 04 06 16 0125-063	150	180	85	0,694
*125-75	PN 10	2 04 06 10 0125-075	152	407	169	1,650
	PN 16	2 04 06 16 0125-075	152	345	170	1,652
*125-90	PN 10	2 04 06 10 0125-090	152	353	169	1,641
	PN 16	2 04 06 16 0125-090	152	353	169	1,820
*125-110	PN 10	2 04 06 10 0125-110	152	365	159	1,855
	PN 16	2 04 06 16 0125-110	152	365	159	2,090
*140-90	PN 10	2 04 06 10 0140-090	163	424	178	2,040
	PN 16	2 04 06 16 0140-090	163	354	178	2,090
*140-110	PN 10	2 04 06 10 0140-110	163	364	178	2,080
	PN 16	2 04 06 16 0140-110	163	369	178	2,375
*140-125	PN 10	2 04 06 10 0140-125	163	371	178	2,380
	PN 16	2 04 06 16 0140-125	163	376	178	2,650
*160-63	PN 10	2 04 06 10 0160-063	195	425	188	2,370
	PN 16	2 04 06 16 0160-063	195	410	188	2,619
*160-75	PN 10	2 04 06 10 0160-075	195	433	188	2,504
	PN 16	2 04 06 16 0160-075	195	438	188	2,795
*160-90	PN 10	2 04 06 10 0160-090	195	369	188	2,480
	PN 16	2 04 06 16 0160-090	195	379	188	2,815
160-110	PN 10-PN 16	2 04 06 16 0160-110	191	221	93	1,734
*160-125	PN 10	2 04 06 10 0160-125	195	386	183	2,982
	PN 16	2 04 06 16 0160-125	195	386	183	3,344
*160-140	PN 10	2 04 06 10 0160-140	195	395	183	3,115
	PN 16	2 04 06 16 0160-140	195	395	183	3,560
*180-110	PN 10	2 04 06 10 0180-110	218	423	201	3,432
	PN 16	2 04 06 16 0180-110	218	423	201	3,825
*180-125	PN 10	2 04 06 10 0180-125	218	425	201	3,717
	PN 16	2 04 06 16 0180-125	218	425	201	4,195
*180-140	PN 10	2 04 06 10 0180-140	218	424	201	3,887
	PN 16	2 04 06 16 0180-140	218	424	201	4,480
*180-160	PN 10	2 04 06 10 0180-160	218	434	201	4,453
	PN 16	2 04 06 16 0180-160	218	434	201	5,100

*İşareti olan ürünler KİT'tir. / *The marked products are KIT

EF Redüksiyon

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Reducer

EF Réduction

ЭЛ. СВАРНОЙ ПЕРЕХОДНИК

مخفض ربط لحام كهربائي

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1


Çap	Basınç	Kod No	d1	L	L1	Net Ağırlık(kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	(mm)	(mm)	Weight (kg)
d - d2						
*200-63	PN 10	2 04 06 10 0200-063	245	483	218	4,587
	PN 16	2 04 06 16 0200-063	245	483	218	5,048
*200-75	PN 10	2 04 06 10 0200-075	245	483	218	4,789
	PN 16	2 04 06 16 0200-075	245	483	218	5,186
*200-90	PN 10	2 04 06 10 0200-090	245	489	218	4,883
	PN 16	2 04 06 16 0200-090	245	489	218	5,359
*200-110	PN 10	2 04 06 10 0200-110	245	440	218	4,945
	PN 16	2 04 06 16 0200-110	245	440	218	5,380
*200-125	PN 10	2 04 06 10 0200-125	245	452	208	5,120
	PN 16	2 04 06 16 0200-125	245	442	218	5,730
*200-140	PN 10	2 04 06 10 0200-140	245	446	223	5,240
	PN 16	2 04 06 16 0200-140	245	446	223	5,780
*200-160	PN 10	2 04 06 10 0200-160	245	446	223	5,892
	PN 16	2 04 06 16 0200-160	245	456	218	6,500
*200-180	PN 10	2 04 06 10 0200-180	245	449	223	6,380
	PN 16	2 04 06 16 0200-180	245	454	218	7,145
*225-110	PN 10	2 04 06 10 0225-110	273	463	236	6,077
	PN 16	2 04 06 16 0225-110	273	458	236	6,745
*225-125	PN 10	2 04 06 10 0225-125	273	470	236	6,291
	PN 16	2 04 06 16 0225-125	273	535	231	7,502
*225-140	PN 10	2 04 06 10 0225-140	273	464	231	6,355
	PN 16	2 04 06 16 0225-140	273	544	231	7,718
*225-160	PN 10	2 04 06 10 0225-160	273	464	236	7,127
	PN 16	2 04 06 16 0225-160	273	469	231	7,845
*225-180	PN 10	2 04 06 10 0225-180	273	497	236	7,877
	PN 16	2 04 06 16 0225-180	273	537	211	9,047
*225-200	PN 10	2 04 06 10 0225-200	273	484	231	8,880
	PN 16	2 04 06 16 0225-200	273	484	211	9,730
*250-75	PN 10	2 04 06 10 0250-075	273	606	216	6,968
	PN 16	2 04 06 16 0250-075	273	551	231	7,273
*250-160	PN 10	2 04 06 10 0250-160	302	520	227	8,607
	PN 16	2 04 06 16 0250-160	302	520	242	9,312
*250-200	PN 10	2 04 06 10 0250-200	302	535	227	10,358
	PN 16	2 04 06 16 0250-200	302	530	242	11,597
*250-225	PN 10	2 04 06 10 0250-225	302	533	227	11,430
	PN 16	2 04 06 16 0250-225	302	533	222	12,090



KİT



Ø180 Ø200 Ø225

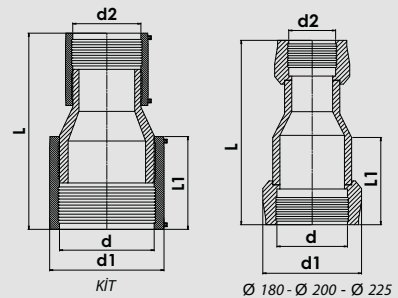

*İşareti olan ürünler KİT'tir. / *The marked products are KIT

EF Redüksiyon

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Reducer

EF Réduction


ЭЛ. СВАРНОЙ ПЕРЕХОДНИК

مخفض ربط لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



KIT



Çap	Basınç	Kod No	d1	L	L1	Net Ağırlık(kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	(mm)	(mm)	Weight (kg)
d - d2						
*280-110	PN 10	2 04 06 10 0280-110	350	612	265	11,093
	PN 16	2 04 06 16 0280-110	350	607	265	12,303
*280-140	PN 10	2 04 06 10 0280-140	350	613	265	11,352
	PN 16	2 04 06 16 0280-140	350	598	265	12,547
*280-200	PN 10	2 04 06 10 0280-200	350	568	265	13,287
	PN 16	2 04 06 16 0280-200	350	553	265	14,595
*280-225	PN 10	2 04 06 10 0280-225	350	576	265	14,497
	PN 16	2 04 06 16 0280-225	350	556	260	15,530
*280-250	PN 10	2 04 06 10 0280-250	350	567	260	15,480
	PN 16	2 04 06 16 0280-250	350	572	260	16,802
*315-160	PN 10	2 04 06 10 0315-160	380	560	283	13,920
	PN 16	2 04 06 16 0315-160	380	555	278	15,635
*315-180	PN 10	2 04 06 10 0315-180	380	619	278	14,845
	PN 16	2 04 06 16 0315-180	380	639	283	16,858
*315-200	PN 10	2 04 06 10 0315-200	380	576	278	15,675
	PN 16	2 04 06 16 0315-200	380	576	283	17,437
*315-250	PN 10	2 04 06 10 0315-250	380	585	278	17,250
	PN 16	2 04 06 16 0315-250	380	580	278	19,685
*315-280	PN 10	2 04 06 10 0315-280	380	608	268	20,375
	PN 16	2 04 06 16 0315-280	380	593	278	22,015
*355-250	PN 10	2 04 06 10 0355-250	410	616	289	18,740
	PN 16	2 04 06 16 0355-250	428	611	284	23,688
*355-280	PN 10	2 04 06 10 0355-280	410	729	289	26,402
	PN 16	2 04 06 16 0355-280	428	704	289	28,152
*400-160	PN 10	2 04 06 10 0400-160	460	663	271	19,153
	PN 16	2 04 06 16 0400-160	489	658	271	24,739
*400-250	PN 10	2 04 06 10 0400-250	460	808	271	25,211
	PN 16	2 04 06 16 0400-250	489	613	276	28,690
*400-315	PN 10	2 04 06 10 0400-315	460	623	271	26,310
	PN 16	2 04 06 16 0400-315	489	638	251	34,512
*400-355	PN 10	2 04 06 10 0400-355	460	625	261	27,555
	PN 16	2 04 06 16 0400-355	489	620	261	36,843
*450-180	PN 10	2 04 06 10 0450-180	510	848	312	31,441
	PN 16	2 04 06 16 0450-180	557	838	312	42,695
*450-315	PN 10	2 04 06 10 0450-315	510	804	312	38,110
	PN 16	2 04 06 16 0450-315	557	839	312	52,649
*500-315	PN 10	2 04 06 10 0500-315	570	888	325	48,250
	PN 16	2 04 06 16 0500-315	615	923	325	67,926

*İşareti olan ürünler KİT'tir. / *The marked products are KIT

EF Kör Tapa

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Cap


EF Bouchon d'obturation

ЭЛ. СВАРНАЯ ЗАГЛУШКА

سدادة نهاية الطرف لحام كهربائي

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	d1	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	(mm)	Weight (kg)
d					
20	PN 10-PN 16	2 04 07 16 0020-000	30	75	0,038
25	PN 10-PN 16	2 04 07 16 0025-000	36	81	0,049
32	PN 10-PN 16	2 04 07 16 0032-000	43	87	0,068
40	PN 10-PN 16	2 04 07 16 0040-000	53	90	0,100
50	PN 10-PN 16	2 04 07 16 0050-000	65	104	0,159
63	PN 10-PN 16	2 04 07 16 0063-000	80	112	0,245
75	PN 10-PN 16	2 04 07 16 0075-000	95	125	0,412
90	PN 10-PN 16	2 04 07 16 0090-000	110	137	0,585
110	PN 10-PN 16	2 04 07 16 0110-000	144	153	0,887
125	PN 10-PN 16	2 04 07 16 0125-000	149	170	1,290
140	PN 10-PN 16	2 04 07 16 0140-000	169	173	1,520
160	PN 10-PN 16	2 04 07 16 0160-000	191	189	2,198
180	PN 10-PN 16	2 04 07 16 0180-000	217	201	3,072
200	PN 10-PN 16	2 04 07 16 0200-000	241	212	4,509
225	PN 10-PN 16	2 04 07 16 0225-000	276	231	5,857
250	PN 10-PN 16	2 04 07 16 0250-000	301	245	7,274
280	PN 10-PN 16	2 04 07 16 0280-000	348	256	10,506
315	PN 10-PN 16	2 04 07 16 0315-000	382	277	13,750
355	PN 10-PN 16	2 04 07 16 0355-000	428	279	17,489
400	PN 10-PN 16	2 04 07 16 0400-000	489	276	23,747



EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Saddle

EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

	Çap	Basınç	Kod No	h	L	Net Ağırlık (kg)
	Size (mm)	Pressure (Bar)	Code No	(mm)	(mm)	Weight (kg)
  L=Length/Uzunluk	d - d1					
	63-63	PN 10-PN 16	2 04 08 16 0063-063	80	161	0,347
	75-63	PN 10-PN 16	2 04 08 16 0075-063	86	161	0,438
	90-63	PN 10-PN 16	2 04 08 16 0090-063	94	161	0,409
	110-63	PN 10-PN 16	2 04 08 16 0110-063	104	161	0,524
	125-63	PN 10-PN 16	2 04 08 16 0125-063	111	161	0,495
	140-63	PN 10-PN 16	2 04 08 16 0140-063	119	161	0,479
	160-63	PN 10-PN 16	2 04 08 16 0160-063	129	161	0,457
	180-63	PN 10-PN 16	2 04 08 16 0180-063	139	161	0,596
	200-63	PN 10-PN 16	2 04 08 16 0200-063	149	162	0,586
	225-63	PN 10-PN 16	2 04 08 16 0225-063	161	162	0,595
	250-63	PN 10-PN 16	2 04 08 16 0250-063	174	162	0,616
	280-63	PN 10-PN 16	2 04 08 16 0280-063	189	162	0,660
	315-63	PN 10-PN 16	2 04 08 16 0315-063	206	162	0,687
	355-63	PN 10-PN 16	2 04 08 16 0355-063	226	162	0,762
	400-63	PN 10-PN 16	2 04 08 16 0400-063	249	162	0,842



EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle


EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınc	Kod No	h	h1	L	Net Ağırlık(kg)
Size (mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	Weight (kg)
d - d1						
63-20	PN 10-PN 16	2 04 08 16 0063-020	80	152	161	0,418
63-25	PN 10-PN 16	2 04 08 16 0063-025	80	152	161	0,441
63-32	PN 10-PN 16	2 04 08 16 0063-032	80	152	161	0,428
63-40	PN 10-PN 16	2 04 08 16 0063-040	80	152	161	0,434
63-50	PN 10-PN 16	2 04 08 16 0063-050	80	175	161	0,470
75-20	PN 10-PN 16	2 04 08 16 0075-020	86	158	161	0,507
75-25	PN 10-PN 16	2 04 08 16 0075-025	86	158	161	0,531
75-32	PN 10-PN 16	2 04 08 16 0075-032	86	158	161	0,518
75-40	PN 10-PN 16	2 04 08 16 0075-040	86	158	161	0,524
75-50	PN 10-PN 16	2 04 08 16 0075-050	86	181	161	0,562
90-20	PN 10-PN 16	2 04 08 16 0090-020	94	166	161	0,481
90-25	PN 10-PN 16	2 04 08 16 0090-025	94	166	161	0,502
90-32	PN 10-PN 16	2 04 08 16 0090-032	94	166	161	0,489
90-40	PN 10-PN 16	2 04 08 16 0090-040	94	166	161	0,495
90-50	PN 10-PN 16	2 04 08 16 0090-050	94	189	161	0,533
110-20	PN 10-PN 16	2 04 08 16 0110-020	104	176	161	0,597
110-25	PN 10-PN 16	2 04 08 16 0110-025	104	176	161	0,619
110-32	PN 10-PN 16	2 04 08 16 0110-032	104	176	161	0,606
110-40	PN 10-PN 16	2 04 08 16 0110-040	104	176	161	0,611
110-50	PN 10-PN 16	2 04 08 16 0110-050	104	199	161	0,650
125-20	PN 10-PN 16	2 04 08 16 0125-020	111	183	161	0,567
125-25	PN 10-PN 16	2 04 08 16 0125-025	111	183	161	0,589
125-32	PN 10-PN 16	2 04 08 16 0125-032	111	183	161	0,575
125-40	PN 10-PN 16	2 04 08 16 0125-040	111	183	161	0,581
125-50	PN 10-PN 16	2 04 08 16 0125-050	111	206	161	0,619
140-20	PN 10-PN 16	2 04 08 16 0140-020	119	191	161	0,560
140-25	PN 10-PN 16	2 04 08 16 0140-025	119	191	161	0,573
140-32	PN 10-PN 16	2 04 08 16 0140-032	119	191	161	0,560
140-40	PN 10-PN 16	2 04 08 16 0140-040	119	191	161	0,566
140-50	PN 10-PN 16	2 04 08 16 0140-050	119	214	161	0,603

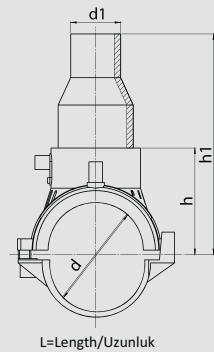

EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Saddle

EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



L=Length/Uzunluk

Çap	Basınç	Kod No	h	h1	L	Net Ağırlık (kg)
Size (mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	Weight (kg)
d - d1						
160-20	PN 10-PN 16	2 04 08 16 0160-020	129	201	161	0,536
160-25	PN 10-PN 16	2 04 08 16 0160-025	129	201	161	0,549
160-32	PN 10-PN 16	2 04 08 16 0160-032	129	201	161	0,536
160-40	PN 10-PN 16	2 04 08 16 0160-040	129	201	161	0,542
160-50	PN 10-PN 16	2 04 08 16 0160-050	129	224	161	0,580
180-20	PN 10-PN 16	2 04 08 16 0180-020	139	211	162	0,666
180-25	PN 10-PN 16	2 04 08 16 0180-025	139	211	162	0,689
180-32	PN 10-PN 16	2 04 08 16 0180-032	139	211	162	0,676
180-40	PN 10-PN 16	2 04 08 16 0180-040	139	211	162	0,682
180-50	PN 10-PN 16	2 04 08 16 0180-050	139	234	162	0,720
200-20	PN 10-PN 16	2 04 08 16 0200-020	149	221	162	0,653
200-25	PN 10-PN 16	2 04 08 16 0200-025	149	221	162	0,680
200-32	PN 10-PN 16	2 04 08 16 0200-032	149	221	162	0,667
200-40	PN 10-PN 16	2 04 08 16 0200-040	149	221	162	0,673
200-50	PN 10-PN 16	2 04 08 16 0200-050	149	244	162	0,710
225-20	PN 10-PN 16	2 04 08 16 0225-020	161	233	162	0,658
225-25	PN 10-PN 16	2 04 08 16 0225-025	161	233	162	0,689
225-32	PN 10-PN 16	2 04 08 16 0225-032	161	233	162	0,675
225-40	PN 10-PN 16	2 04 08 16 0225-040	161	233	162	0,682
225-50	PN 10-PN 16	2 04 08 16 0225-050	161	256	162	0,719
250-20	PN 10-PN 16	2 04 08 16 0250-020	174	246	162	0,691
250-25	PN 10-PN 16	2 04 08 16 0250-025	174	246	162	0,709
250-32	PN 10-PN 16	2 04 08 16 0250-032	174	246	162	0,696
250-40	PN 10-PN 16	2 04 08 16 0250-040	174	246	162	0,702
250-50	PN 10-PN 16	2 04 08 16 0250-050	174	269	162	0,740
280-20	PN 10-PN 16	2 04 08 16 0280-020	189	261	162	0,727
280-25	PN 10-PN 16	2 04 08 16 0280-025	189	261	162	0,754
280-32	PN 10-PN 16	2 04 08 16 0280-032	189	261	162	0,740
280-40	PN 10-PN 16	2 04 08 16 0280-040	189	261	162	0,746
280-50	PN 10-PN 16	2 04 08 16 0280-050	189	284	162	0,784

EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle


EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	h	h1	L	Net Ağırlık (kg)
Size (mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	Weight (kg)
d - d1						
315-20	PN 10-PN 16	2 04 08 16 0315-020	206	278	161	0,742
315-25	PN 10-PN 16	2 04 08 16 0315-025	206	278	161	0,781
315-32	PN 10-PN 16	2 04 08 16 0315-032	206	278	161	0,767
315-40	PN 10-PN 16	2 04 08 16 0315-040	206	278	161	0,774
315-50	PN 10-PN 16	2 04 08 16 0315-050	206	301	161	0,811
355-20	PN 10-PN 16	2 04 08 16 0355-020	226	298	161	0,825
355-25	PN 10-PN 16	2 04 08 16 0355-025	226	298	161	0,856
355-32	PN 10-PN 16	2 04 08 16 0355-032	226	298	161	0,842
355-40	PN 10-PN 16	2 04 08 16 0355-040	226	298	161	0,848
355-50	PN 10-PN 16	2 04 08 16 0355-050	226	321	161	0,886
400-20	PN 10-PN 16	2 04 08 16 0400-020	249	321	161	0,895
400-25	PN 10-PN 16	2 04 08 16 0400-025	249	321	161	0,936
400-32	PN 10-PN 16	2 04 08 16 0400-032	249	321	161	0,922
400-40	PN 10-PN 16	2 04 08 16 0400-040	249	321	161	0,927
400-50	PN 10-PN 16	2 04 08 16 0400-050	249	344	161	0,966



L=Length/Uzunluk



EF Tamir Semeri

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Repair Saddle

EF Selle de Réparation


ЭЛ. СВАРНОЙ РЕМОНТНИК

مربط سرجي للصيانة لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	h	L	Net Ağırlık (kg)
Size (mm)	Pressure(Bar)	Code No	(mm)	(mm)	Weight (kg)
d					
40	PN 10-PN 16	2 04 08 16 0040-000	33	99	0,134
50	PN 10-PN 16	2 04 08 16 0050-000	33	99	0,134



L=Length/Uzunluk

Çap	Basınç	Kod No	h	L	Net Ağırlık (kg)
Size (mm)	Pressure(Bar)	Code No	(mm)	(mm)	Weight (kg)
d					
63	PN 10-PN 16	2 04 08 16 0063-000	102	161	0,424
75	PN 10-PN 16	2 04 08 16 0075-000	108	161	0,513
90	PN 10-PN 16	2 04 08 16 0090-000	116	161	0,488
110	PN 10-PN 16	2 04 08 16 0110-000	126	161	0,601
125	PN 10-PN 16	2 04 08 16 0125-000	133	161	0,574
140	PN 10-PN 16	2 04 08 16 0140-000	141	161	0,551
160	PN 10-PN 16	2 04 08 16 0160-000	151	161	0,532
180	PN 10-PN 16	2 04 08 16 0180-000	161	162	0,671
200	PN 10-PN 16	2 04 08 16 0200-000	171	162	0,659
225	PN 10-PN 16	2 04 08 16 0225-000	183	162	0,671
250	PN 10-PN 16	2 04 08 16 0250-000	196	162	0,690
280	PN 10-PN 16	2 04 08 16 0280-000	211	162	0,736
315	PN 10-PN 16	2 04 08 16 0315-000	228	161	0,758
355	PN 10-PN 16	2 04 08 16 0355-000	248	161	0,835
400	PN 10-PN 16	2 04 08 16 0400-000	271	161	0,835



EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle

EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА


مربط سرجي لحام كهربيائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	Weight (kg)
d-d1				
125-75	PN 10-PN 16	2 04 08 16 0125-075	88	0,900
125-90	PN 10-PN 16	2 04 08 16 0125-090	88	1,000
140-75	PN 10-PN 16	2 04 08 16 0140-075	88	1,300
140-90	PN 10-PN 16	2 04 08 16 0140-090	88	1,400
160-75	PN 10-PN 16	2 04 08 16 0160-075	64	1,000
160-90	PN 10-PN 16	2 04 08 16 0160-090	64	1,080
160-110	PN 10-PN 16	2 04 08 16 0160-110	83	1,120
160-125	PN 10-PN 16	2 04 08 16 0160-125	97	1,350
160-140	PN 10-PN 16	2 04 08 16 0160-140	150	1,870
180-75	PN 10-PN 16	2 04 08 16 0180-075	120	3,100
180-90	PN 10-PN 16	2 04 08 16 0180-090	120	3,300
180-110	PN 10-PN 16	2 04 08 16 0180-110	120	3,500
180-125	PN 10-PN 16	2 04 08 16 0180-125	120	3,700
180-140	PN 10-PN 16	2 04 08 16 0180-140	150	4,050
180-160	PN 10-PN 16	2 04 08 16 0180-160	135	4,100
200-75	PN 10-PN 16	2 04 08 16 0200-075	120	1,875
200-90	PN 10-PN 16	2 04 08 16 0200-090	120	1,925
200-110	PN 10-PN 16	2 04 08 16 0200-110	120	1,800
200-125	PN 10-PN 16	2 04 08 16 0200-125	120	1,900
200-140	PN 10-PN 16	2 04 08 16 0200-140	150	4,900
200-160	PN 10-PN 16	2 04 08 16 0200-160	135	4,200
225-75	PN 10-PN 16	2 04 08 16 0225-075	120	1,940
225-90	PN 10-PN 16	2 04 08 16 0225-090	120	1,975
225-110	PN 10-PN 16	2 04 08 16 0225-110	120	1,850
225-125	PN 10-PN 16	2 04 08 16 0225-125	120	1,950
225-140	PN 10-PN 16	2 04 08 16 0225-140	150	4,950
225-160	PN 10-PN 16	2 04 08 16 0225-160	135	4,250
225-180	PN 10-PN 16	2 04 08 16 0225-180	160	4,700
225-200	PN 10-PN 16	2 04 08 16 0225-200	150	4,650



Ø160-90 - Ø160-110



EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle

EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	Weight (kg)
d-d1				
250-75	PN 10-PN 16	2 04 08 16 0250-075	120	1,900
250-90	PN 10-PN 16	2 04 08 16 0250-090	120	1,950
250-110	PN 10-PN 16	2 04 08 16 0250-110	120	1,850
250-125	PN 10-PN 16	2 04 08 16 0250-125	120	1,950
250-140	PN 10-PN 16	2 04 08 16 0250-140	150	5,100
250-160	PN 10-PN 16	2 04 08 16 0250-160	135	4,400
250-180	PN 10-PN 16	2 04 08 16 0250-180	160	4,900
250-200	PN 10-PN 16	2 04 08 16 0250-200	150	3,100
250-225	PN 10-PN 16	2 04 08 16 0250-225	170	4,200
280-75	PN 10-PN 16	2 04 08 16 0280-075	120	2,000
280-90	PN 10-PN 16	2 04 08 16 0280-090	120	2,075
280-110	PN 10-PN 16	2 04 08 16 0280-110	120	1,950
280-125	PN 10-PN 16	2 04 08 16 0280-125	120	1,980
280-140	PN 10-PN 16	2 04 08 16 0280-140	150	5,200
280-160	PN 10-PN 16	2 04 08 16 0280-160	135	4,500
280-180	PN 10-PN 16	2 04 08 16 0280-180	160	5,150
280-200	PN 10-PN 16	2 04 08 16 0280-200	150	3,250
280-225	PN 10-PN 16	2 04 08 16 0280-225	170	4,350
315-75	PN 10-PN 16	2 04 08 16 0315-075	120	2,075
315-90	PN 10-PN 16	2 04 08 16 0315-090	120	2,100
315-110	PN 10-PN 16	2 04 08 16 0315-110	120	1,925
315-125	PN 10-PN 16	2 04 08 16 0315-125	120	2,000
315-140	PN 10-PN 16	2 04 08 16 0315-140	150	5,250
315-160	PN 10-PN 16	2 04 08 16 0315-160	135	4,600
315-180	PN 10-PN 16	2 04 08 16 0315-180	160	5,200
315-200	PN 10-PN 16	2 04 08 16 0315-200	150	3,400
315-225	PN 10-PN 16	2 04 08 16 0315-225	170	4,590
*315-250	PN 10-PN 16	2 04 08 16 0315-250	***	***
355-75	PN 10-PN 16	2 04 08 16 0355-075	120	2,375
355-90	PN 10-PN 16	2 04 08 16 0355-090	120	2,460
355-110	PN 10-PN 16	2 04 08 16 0355-110	120	2,200
355-125	PN 10-PN 16	2 04 08 16 0355-125	120	2,100
355-140	PN 10-PN 16	2 04 08 16 0355-140	150	5,600
355-160	PN 10-PN 16	2 04 08 16 0355-160	135	4,800
355-180	PN 10-PN 16	2 04 08 16 0355-180	160	5,450
355-200	PN 10-PN 16	2 04 08 16 0355-200	150	3,650
355-225	PN 10-PN 16	2 04 08 16 0355-225	170	4,430
*355-250	PN 10-PN 16	2 04 08 16 0355-250	***	***

*İşareti olan ürünler özel olarak üretilmektedir. / *Specially produced upon order.

EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle


EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	Weight (kg)
d-d1				
400-75	PN 10-PN 16	2 04 08 16 0400-075	120	2,300
400-90	PN 10-PN 16	2 04 08 16 0400-090	120	2,400
400-110	PN 10-PN 16	2 04 08 16 0400-110	120	1,850
400-125	PN 10-PN 16	2 04 08 16 0400-125	120	2,150
400-140	PN 10-PN 16	2 04 08 16 0400-140	150	6,200
400-160	PN 10-PN 16	2 04 08 16 0400-160	135	5,050
400-180	PN 10-PN 16	2 04 08 16 0400-180	160	5,700
400-200	PN 10-PN 16	2 04 08 16 0400-200	150	3,825
400-225	PN 10-PN 16	2 04 08 16 0400-225	170	4,520
*400-250	PN 10-PN 16	2 04 08 16 0400-250	***	***
*400-280	PN 10-PN 16	2 04 08 16 0400-280	***	***
*400-315	PN 10-PN 16	2 04 08 16 0400-315	***	***
*400-355	PN 10-PN 16	2 04 08 16 0400-355	***	***
450-63	PN 10-PN 16	2 04 08 16 0450-063	125	2,350
450-75	PN 10-PN 16	2 04 08 16 0450-075	120	2,375
450-90	PN 10-PN 16	2 04 08 16 0450-090	120	2,450
450-110	PN 10-PN 16	2 04 08 16 0450-110	120	1,900
450-125	PN 10-PN 16	2 04 08 16 0450-125	120	2,150
450-140	PN 10-PN 16	2 04 08 16 0450-140	150	5,350
450-160	PN 10-PN 16	2 04 08 16 0450-160	135	4,635
450-180	PN 10-PN 16	2 04 08 16 0450-180	160	5,700
450-200	PN 10-PN 16	2 04 08 16 0450-200	150	3,950
450-225	PN 10-PN 16	2 04 08 16 0450-225	170	4,600
*450-250	PN 10-PN 16	2 04 08 16 0450-250	***	***
*450-280	PN 10-PN 16	2 04 08 16 0450-280	***	***
*450-315	PN 10-PN 16	2 04 08 16 0450-315	***	***
*450-355	PN 10-PN 16	2 04 08 16 0450-355	***	***



* İşareti olan ürünler özel olarak üretilmektedir. / *Specially produced upon order.

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle

EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	Weight (kg)
d-d1				
500-63	PN 10-PN 16	2 04 08 16 0500-063	125	2,350
500-75	PN 10-PN 16	2 04 08 16 0500-075	120	2,375
500-90	PN 10-PN 16	2 04 08 16 0500-090	120	2,450
500-110	PN 10-PN 16	2 04 08 16 0500-110	120	1,925
500-125	PN 10-PN 16	2 04 08 16 0500-125	120	2,150
500-140	PN 10-PN 16	2 04 08 16 0500-140	150	5,350
500-160	PN 10-PN 16	2 04 08 16 0500-160	135	4,690
500-180	PN 10-PN 16	2 04 08 16 0500-180	160	5,900
500-200	PN 10-PN 16	2 04 08 16 0500-200	150	4,025
500-225	PN 10-PN 16	2 04 08 16 0500-225	170	4,650
*500-250	PN 10-PN 16	2 04 08 16 0500-250	***	***
*500-280	PN 10-PN 16	2 04 08 16 0500-280	***	***
*500-315	PN 10-PN 16	2 04 08 16 0500-315	***	***
*500-355	PN 10-PN 16	2 04 08 16 0500-355	***	***
*500-400	PN 10-PN 16	2 04 08 16 0500-400	***	***
*500-450	PN 10-PN 16	2 04 08 16 0500-450	***	***
560-63	PN 10-PN 16	2 04 08 16 0560-063	125	2,400
560-75	PN 10-PN 16	2 04 08 16 0560-075	120	2,350
560-90	PN 10-PN 16	2 04 08 16 0560-090	120	2,400
560-110	PN 10-PN 16	2 04 08 16 0560-110	120	2,025
560-125	PN 10-PN 16	2 04 08 16 0560-125	120	2,200
560-140	PN 10-PN 16	2 04 08 16 0560-140	150	5,750
560-160	PN 10-PN 16	2 04 08 16 0560-160	135	4,890
560-180	PN 10-PN 16	2 04 08 16 0560-180	160	5,900
560-200	PN 10-PN 16	2 04 08 16 0560-200	150	4,600
560-225	PN 10-PN 16	2 04 08 16 0560-225	170	4,800
*560-250	PN 10-PN 16	2 04 08 16 0560-250	***	***
*560-280	PN 10-PN 16	2 04 08 16 0560-280	***	***
*560-315	PN 10-PN 16	2 04 08 16 0560-315	***	***
*560-355	PN 10-PN 16	2 04 08 16 0560-355	***	***
*560-400	PN 10-PN 16	2 04 08 16 0560-400	***	***
*560-450	PN 10-PN 16	2 04 08 16 0560-450	***	***

* İşareti olan ürünler özel olarak üretilmektedir. / Specially produced upon order.

EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle


EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	Weight (kg)
d-d1				
630-63	PN 10-PN 16	2 04 08 16 0630-063	125	2,400
630-75	PN 10-PN 16	2 04 08 16 0630-075	120	2,600
630-90	PN 10-PN 16	2 04 08 16 0630-090	120	2,650
630-110	PN 10-PN 16	2 04 08 16 0630-110	120	2,150
630-125	PN 10-PN 16	2 04 08 16 0630-125	120	2,200
630-140	PN 10-PN 16	2 04 08 16 0630-140	150	5,800
630-160	PN 10-PN 16	2 04 08 16 0630-160	135	4,950
630-180	PN 10-PN 16	2 04 08 16 0630-180	160	6,000
630-200	PN 10-PN 16	2 04 08 16 0630-200	150	4,700
630-225	PN 10-PN 16	2 04 08 16 0630-225	170	4,900
*630-250	PN 10-PN 16	2 04 08 16 0630-250	***	***
*630-280	PN 10-PN 16	2 04 08 16 0630-280	***	***
*630-315	PN 10-PN 16	2 04 08 16 0630-315	***	***
*630-355	PN 10-PN 16	2 04 08 16 0630-355	***	***
*630-400	PN 10-PN 16	2 04 08 16 0630-400	***	***
*630-450	PN 10-PN 16	2 04 08 16 0630-450	***	***
*630-500	PN 10-PN 16	2 04 08 16 0630-500	***	***
*630-560	PN 10-PN 16	2 04 08 16 0630-560	***	***
710-63	PN 10-PN 16	2 04 08 16 0710-063	125	2,400
710-75	PN 10-PN 16	2 04 08 16 0710-075	120	2,250
710-90	PN 10-PN 16	2 04 08 16 0710-090	120	2,300
710-110	PN 10-PN 16	2 04 08 16 0710-110	120	1,650
710-125	PN 10-PN 16	2 04 08 16 0710-125	120	2,250
710-140	PN 10-PN 16	2 04 08 16 0710-140	150	5,800
710-160	PN 10-PN 16	2 04 08 16 0710-160	135	4,950
710-180	PN 10-PN 16	2 04 08 16 0710-180	160	5,800
710-200	PN 10-PN 16	2 04 08 16 0710-200	150	3,930
710-225	PN 10-PN 16	2 04 08 16 0710-225	170	4,950
*710-250	PN 10-PN 16	2 04 08 16 0710-250	***	***
*710-280	PN 10-PN 16	2 04 08 16 0710-280	***	***
*710-315	PN 10-PN 16	2 04 08 16 0710-315	***	***
*710-355	PN 10-PN 16	2 04 08 16 0710-355	***	***
*710-400	PN 10-PN 16	2 04 08 16 0710-400	***	***
*710-450	PN 10-PN 16	2 04 08 16 0710-450	***	***
*710-500	PN 10-PN 16	2 04 08 16 0710-500	***	***
*710-560	PN 10-PN 16	2 04 08 16 0710-560	***	***



* İşareti olan ürünler özel olarak üretilmektedir. / Specially produced upon order.

EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle

EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربائي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	Weight (kg)
d-d1				
800-63	PN 10-PN 16	2 04 08 16 0800-063	125	2,400
800-75	PN 10-PN 16	2 04 08 16 0800-075	120	2,200
800-90	PN 10-PN 16	2 04 08 16 0800-090	120	2,300
800-110	PN 10-PN 16	2 04 08 16 0800-110	120	1,700
800-125	PN 10-PN 16	2 04 08 16 0800-125	125	2,200
800-140	PN 10-PN 16	2 04 08 16 0800-140	150	5,800
800-160	PN 10-PN 16	2 04 08 16 0800-160	135	4,950
800-180	PN 10-PN 16	2 04 08 16 0800-180	160	5,700
800-200	PN 10-PN 16	2 04 08 16 0800-200	150	3,900
800-225	PN 10-PN 16	2 04 08 16 0800-225	170	4,950
*800-250	PN 10-PN 16	2 04 08 16 0800-250	***	***
*800-280	PN 10-PN 16	2 04 08 16 0800-280	***	***
*800-315	PN 10-PN 16	2 04 08 16 0800-315	***	***
*800-355	PN 10-PN 16	2 04 08 16 0800-355	***	***
*800-400	PN 10-PN 16	2 04 08 16 0800-400	***	***
*800-450	PN 10-PN 16	2 04 08 16 0800-450	***	***
*800-500	PN 10-PN 16	2 04 08 16 0800-500	***	***
*800-560	PN 10-PN 16	2 04 08 16 0800-560	***	***
*800-630	PN 10-PN 16	2 04 08 16 0800-630	***	***
900-63	PN 10-PN 16	2 04 08 16 0900-063	125	2,250
900-75	PN 10-PN 16	2 04 08 16 0900-075	120	2,200
900-90	PN 10-PN 16	2 04 08 16 0900-090	120	2,300
900-110	PN 10-PN 16	2 04 08 16 0900-110	120	1,700
900-125	PN 10-PN 16	2 04 08 16 0900-125	120	2,150
900-140	PN 10-PN 16	2 04 08 16 0900-140	150	5,800
900-160	PN 10-PN 16	2 04 08 16 0900-160	135	4,950
900-180	PN 10-PN 16	2 04 08 16 0900-180	160	5,700
900-200	PN 10-PN 16	2 04 08 16 0900-200	150	3,900
900-225	PN 10-PN 16	2 04 08 16 0900-225	170	4,950
*900-250	PN 10-PN 16	2 04 08 16 0900-250	***	***
*900-280	PN 10-PN 16	2 04 08 16 0900-280	***	***
*900-315	PN 10-PN 16	2 04 08 16 0900-315	***	***
*900-355	PN 10-PN 16	2 04 08 16 0900-355	***	***
*900-400	PN 10-PN 16	2 04 08 16 0900-400	***	***
*900-450	PN 10-PN 16	2 04 08 16 0900-450	***	***
*900-500	PN 10-PN 16	2 04 08 16 0900-500	***	***
*900-560	PN 10-PN 16	2 04 08 16 0900-560	***	***
*900-630	PN 10-PN 16	2 04 08 16 0900-630	***	***

* İşareti olan ürünler özel olarak üretilmektedir. / Specially produced upon order.

EF Semer

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Saddle


EF Selle

ЭЛ. СВАРНАЯ СЕДЕЛКА

مربط سرجي لحام كهربي

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	L	Net Ağırlık (kg)
Size (mm)	Pressure (Bar)	Code No	(mm)	Weight (kg)
d-d1				
1000-63	PN 10-PN 16	2 04 08 16 1000-063	125	2,250
1000-75	PN 10-PN 16	2 04 08 16 1000-075	120	2,200
1000-90	PN 10-PN 16	2 04 08 16 1000-090	120	2,300
1000-110	PN 10-PN 16	2 04 08 16 1000-110	120	1,700
1000-125	PN 10-PN 16	2 04 08 16 1000-125	120	2,150
1000-140	PN 10-PN 16	2 04 08 16 1000-140	150	5,800
1000-160	PN 10-PN 16	2 04 08 16 1000-160	135	4,950
1000-180	PN 10-PN 16	2 04 08 16 1000-180	160	5,700
1000-200	PN 10-PN 16	2 04 08 16 1000-200	150	3,900
1000-225	PN 10-PN 16	2 04 08 16 1000-225	170	4,950
*1000-250	PN 10-PN 16	2 04 08 16 1000-250	***	***
*1000-280	PN 10-PN 16	2 04 08 16 1000-280	***	***
*1000-315	PN 10-PN 16	2 04 08 16 1000-315	***	***
*1000-355	PN 10-PN 16	2 04 08 16 1000-355	***	***
*1000-400	PN 10-PN 16	2 04 08 16 1000-400	***	***
*1000-450	PN 10-PN 16	2 04 08 16 1000-450	***	***
*1000-500	PN 10-PN 16	2 04 08 16 1000-500	***	***
*1000-560	PN 10-PN 16	2 04 08 16 1000-560	***	***
*1000-630	PN 10-PN 16	2 04 08 16 1000-630	***	***

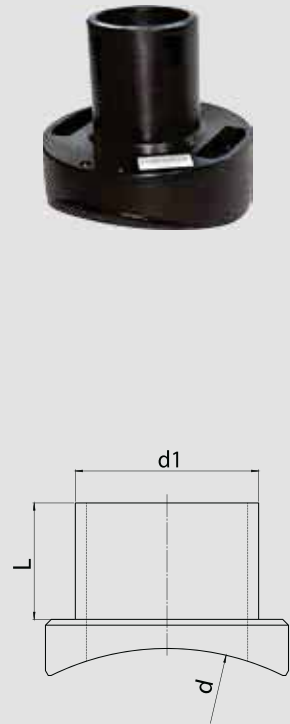

*İşareti olan ürünler özel olarak üretilmektedir. / Specially produced upon order.



EF Vanasız Servis TE (Mono Block)

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Tapping TEE (Without Valve) (Mono Block)

EF Collier de Prise Monobloc électrosoudable (Sans Vanne)

Эл. Сварное Седло (МОНОБЛОК)

مربط تي لحام كهربائي بدون صمام خدماتي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



L=Length/Uzunluk

Çap	Basınç	Kod No	h	h1	L	L1	Z	Net Ağırlık(kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d - d1								
40-20	PN 10-PN 16	2 04 11 16 0040-020	99	33	99	70	110	0,235
40-25	PN 10-PN 16	2 04 11 16 0040-025	99	33	99	70	110	0,235
40-32	PN 10-PN 16	2 04 11 16 0040-032	99	33	99	75	110	0,238
50-20	PN 10-PN 16	2 04 11 16 0050-020	105	38	99	70	110	0,228
50-25	PN 10-PN 16	2 04 11 16 0050-025	105	38	99	70	110	0,227
50-32	PN 10-PN 16	2 04 11 16 0050-032	105	38	99	75	110	0,228
63-20	PN 10-PN 16	2 04 11 16 0063-020	168	71	157	84	120	0,480
63-25	PN 10-PN 16	2 04 11 16 0063-025	168	71	157	84	120	0,490
63-32	PN 10-PN 16	2 04 11 16 0063-032	168	71	157	84	120	0,500
63-40	PN 10-PN 16	2 04 11 16 0063-040	168	71	157	84	120	0,520
75-20	PN 10-PN 16	2 04 11 16 0075-020	175	71	157	84	120	0,530
75-25	PN 10-PN 16	2 04 11 16 0075-025	175	71	157	84	120	0,540
75-32	PN 10-PN 16	2 04 11 16 0075-032	175	71	157	84	120	0,550
75-40	PN 10-PN 16	2 04 11 16 0075-040	175	71	157	84	120	0,560
90-20	PN 10-PN 16	2 04 11 16 0090-020	177	88	157	82	120	0,520
90-25	PN 10-PN 16	2 04 11 16 0090-025	177	88	157	82	120	0,530
90-32	PN 10-PN 16	2 04 11 16 0090-032	177	88	157	82	120	0,540
90-40	PN 10-PN 16	2 04 11 16 0090-040	177	88	157	82	120	0,550
110-20	PN 10-PN 16	2 04 11 16 0110-020	185	96	160	82	120	0,630
110-25	PN 10-PN 16	2 04 11 16 0110-025	185	96	160	82	120	0,640
110-32	PN 10-PN 16	2 04 11 16 0110-032	185	96	160	82	120	0,650
110-40	PN 10-PN 16	2 04 11 16 0110-040	185	96	160	82	120	0,660
125-20	PN 10-PN 16	2 04 11 16 0125-020	188	102	156	60	96	0,740
125-25	PN 10-PN 16	2 04 11 16 0125-025	188	102	156	60	96	0,750
125-32	PN 10-PN 16	2 04 11 16 0125-032	188	102	156	60	96	0,760
125-40	PN 10-PN 16	2 04 11 16 0125-040	188	102	156	60	96	0,770
140-20	PN 10-PN 16	2 04 11 16 0140-020	196	102	156	60	96	0,780
140-25	PN 10-PN 16	2 04 11 16 0140-025	196	102	156	60	96	0,790
140-32	PN 10-PN 16	2 04 11 16 0140-032	196	102	156	60	96	0,800
140-40	PN 10-PN 16	2 04 11 16 0140-040	196	102	156	60	96	0,810
160-20	PN 10-PN 16	2 04 11 16 0160-020	204	122	157	61	95	0,630
160-25	PN 10-PN 16	2 04 11 16 0160-025	204	122	157	61	95	0,640
160-32	PN 10-PN 16	2 04 11 16 0160-032	204	122	157	61	95	0,650
160-40	PN 10-PN 16	2 04 11 16 0160-040	204	122	157	61	95	0,660
200-20	PN 10-PN 16	2 04 11 16 0200-020	224	122	157	61	95	0,720
200-25	PN 10-PN 16	2 04 11 16 0200-025	224	122	157	61	95	0,730
200-32	PN 10-PN 16	2 04 11 16 0200-032	224	122	157	61	95	0,740
200-40	PN 10-PN 16	2 04 11 16 0200-040	224	122	157	61	95	0,750

EF Vanasız Servis TE 360°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Tapping TEE (Without Valve) 360°


EF Collier de Prise (Sans Vanne) 360°

Эл. Сварное Седло 360°

مربط تي 360 لحام كهربائي بدون صمام خدماتي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	h	h1	L	L1	Z	Net Ağırlık(kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d - d1								
63-20	PN 10-PN 16	2 04 09 16 0063-020	180	97	161	76	129	0,712
63-25	PN 10-PN 16	2 04 09 16 0063-025	180	97	161	75	128	0,706
63-32	PN 10-PN 16	2 04 09 16 0063-032	180	97	161	75	129	0,705
63-40	PN 10-PN 16	2 04 09 16 0063-040	180	97	161	82	136	0,722
63-50	PN 10-PN 16	2 04 09 16 0063-050	227	110	161	100	160	1,024
63-63	PN 10-PN 16	2 04 09 16 0063-063	227	110	161	97	157	1,086
75-20	PN 10-PN 16	2 04 09 16 0075-020	186	104	161	76	129	0,801
75-25	PN 10-PN 16	2 04 09 16 0075-025	186	104	161	75	128	0,795
75-32	PN 10-PN 16	2 04 09 16 0075-032	186	104	161	75	129	0,794
75-40	PN 10-PN 16	2 04 09 16 0075-040	186	104	161	82	136	0,812
75-50	PN 10-PN 16	2 04 09 16 0075-050	233	121	161	100	160	1,113
75-63	PN 10-PN 16	2 04 09 16 0075-063	233	121	161	97	157	1,175
90-20	PN 10-PN 16	2 04 09 16 0090-020	194	112	161	76	129	0,772
90-25	PN 10-PN 16	2 04 09 16 0090-025	194	112	161	75	128	0,765
90-32	PN 10-PN 16	2 04 09 16 0090-032	194	112	161	75	129	0,765
90-40	PN 10-PN 16	2 04 09 16 0090-040	194	112	161	82	136	0,782
90-50	PN 10-PN 16	2 04 09 16 0090-050	241	129	161	100	160	1,084
90-63	PN 10-PN 16	2 04 09 16 0090-063	241	129	161	97	157	1,146
110-20	PN 10-PN 16	2 04 09 16 0110-020	204	122	161	76	129	0,890
110-25	PN 10-PN 16	2 04 09 16 0110-025	204	122	161	75	128	0,884
110-32	PN 10-PN 16	2 04 09 16 0110-032	204	122	161	75	129	0,882
110-40	PN 10-PN 16	2 04 09 16 0110-040	204	122	161	82	136	0,900
110-50	PN 10-PN 16	2 04 09 16 0110-050	251	139	161	100	160	1,201
110-63	PN 10-PN 16	2 04 09 16 0110-063	251	139	161	97	157	1,263
125-20	PN 10-PN 16	2 04 09 16 0125-020	211	129	161	76	129	0,860
125-25	PN 10-PN 16	2 04 09 16 0125-025	211	129	161	75	128	0,854
125-32	PN 10-PN 16	2 04 09 16 0125-032	211	129	161	75	129	0,852
125-40	PN 10-PN 16	2 04 09 16 0125-040	211	129	161	82	136	0,870
125-50	PN 10-PN 16	2 04 09 16 0125-050	258	146	161	100	160	1,171
125-63	PN 10-PN 16	2 04 09 16 0125-063	258	146	161	97	157	1,233



L=Length/Uzunluk

EF Vanasız Servis TE 360°

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Tapping TEE (Without Valve) 360°

EF Collier de Prise (Sans Vanne) 360°

Эл. Сварное Седло 360°

مربط تي 360 لحام كهربائي بدون صمام خدماتي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

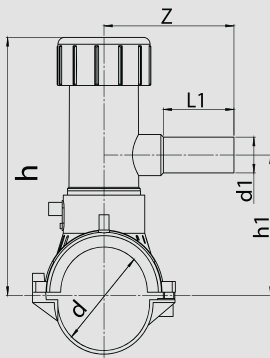

L=Length/Uzunluk

Çap	Basınç	Kod No	h	h1	L	L1	Z	Net Ağırlık(kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d - d1								
140-20	PN 10-PN 16	2 04 09 16 0140-020	219	137	161	76	129	0,838
140-25	PN 10-PN 16	2 04 09 16 0140-025	219	137	161	75	128	0,834
140-32	PN 10-PN 16	2 04 09 16 0140-032	219	137	161	75	129	0,832
140-40	PN 10-PN 16	2 04 09 16 0140-040	219	137	161	82	136	0,849
140-50	PN 10-PN 16	2 04 09 16 0140-050	266	154	161	100	160	1,150
140-63	PN 10-PN 16	2 04 09 16 0140-063	266	154	161	97	157	1,213
160-20	PN 10-PN 16	2 04 09 16 0160-020	229	147	161	76	129	0,820
160-25	PN 10-PN 16	2 04 09 16 0160-025	229	147	161	75	128	0,814
160-32	PN 10-PN 16	2 04 09 16 0160-032	229	147	161	75	129	0,812
160-40	PN 10-PN 16	2 04 09 16 0160-040	229	147	161	82	136	0,830
160-50	PN 10-PN 16	2 04 09 16 0160-050	276	164	161	100	160	1,131
160-63	PN 10-PN 16	2 04 09 16 0160-063	276	164	161	97	157	1,194
180-20	PN 10-PN 16	2 04 09 16 0180-020	239	157	162	76	129	0,958
180-25	PN 10-PN 16	2 04 09 16 0180-025	239	157	162	75	128	0,953
180-32	PN 10-PN 16	2 04 09 16 0180-032	239	157	162	75	129	0,952
180-40	PN 10-PN 16	2 04 09 16 0180-040	239	157	162	82	136	0,968
180-50	PN 10-PN 16	2 04 09 16 0180-050	286	174	162	100	160	1,270
180-63	PN 10-PN 16	2 04 09 16 0180-063	286	174	162	97	157	1,332
200-20	PN 10-PN 16	2 04 09 16 0200-020	249	168	162	76	129	0,947
200-25	PN 10-PN 16	2 04 09 16 0200-025	249	168	162	75	128	0,942
200-32	PN 10-PN 16	2 04 09 16 0200-032	249	168	162	75	129	0,940
200-40	PN 10-PN 16	2 04 09 16 0200-040	249	168	162	82	136	0,958
200-50	PN 10-PN 16	2 04 09 16 0200-050	296	184	162	100	160	1,260
200-63	PN 10-PN 16	2 04 09 16 0200-063	296	184	162	97	157	1,322
225-20	PN 10-PN 16	2 04 09 16 0225-020	261	179	162	76	129	0,957
225-25	PN 10-PN 16	2 04 09 16 0225-025	261	179	162	75	128	0,952
225-32	PN 10-PN 16	2 04 09 16 0225-032	261	179	162	75	129	0,952
225-40	PN 10-PN 16	2 04 09 16 0225-040	261	179	162	82	136	0,970
225-50	PN 10-PN 16	2 04 09 16 0225-050	308	196	162	100	160	1,271
225-63	PN 10-PN 16	2 04 09 16 0225-063	308	196	162	97	157	1,332

EF Vanasız Servis TE 360°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Tapping TEE (Without Valve) 360°


EF Collier de Prise (Sans Vanne) 360°

Эл. Сварное Седло 360°

مربط تي 360 لحام كهربائي بدون صمام خدماتي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	h	h1	L	L1	Z	Net Ağırlık(kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d - d1								
250-20	PN 10-PN 16	2 04 09 16 0250-020	274	192	162	76	129	0,981
250-25	PN 10-PN 16	2 04 09 16 0250-025	274	192	162	75	128	0,974
250-32	PN 10-PN 16	2 04 09 16 0250-032	274	192	162	75	129	0,973
250-40	PN 10-PN 16	2 04 09 16 0250-040	274	192	162	82	136	0,990
250-50	PN 10-PN 16	2 04 09 16 0250-050	321	209	162	100	160	1,291
250-63	PN 10-PN 16	2 04 09 16 0250-063	321	209	162	97	157	1,353
280-20	PN 10-PN 16	2 04 09 16 0280-020	289	207	162	76	129	1,024
280-25	PN 10-PN 16	2 04 09 16 0280-025	289	207	162	75	128	1,016
280-32	PN 10-PN 16	2 04 09 16 0280-032	289	207	162	75	129	1,017
280-40	PN 10-PN 16	2 04 09 16 0280-040	289	207	162	82	136	1,034
280-50	PN 10-PN 16	2 04 09 16 0280-050	336	224	162	100	160	1,336
280-63	PN 10-PN 16	2 04 09 16 0280-063	336	224	162	97	157	1,398
315-20	PN 10-PN 16	2 04 09 16 0315-020	306	224	162	76	129	1,051
315-25	PN 10-PN 16	2 04 09 16 0315-025	306	224	162	75	128	1,045
315-32	PN 10-PN 16	2 04 09 16 0315-032	306	224	162	75	129	1,044
315-40	PN 10-PN 16	2 04 09 16 0315-040	306	224	162	82	136	1,061
315-50	PN 10-PN 16	2 04 09 16 0315-050	353	241	162	100	160	1,363
315-63	PN 10-PN 16	2 04 09 16 0315-063	353	241	162	97	157	1,425
355-20	PN 10-PN 16	2 04 09 16 0355-020	326	244	162	76	129	1,124
355-25	PN 10-PN 16	2 04 09 16 0355-025	326	244	162	75	128	1,118
355-32	PN 10-PN 16	2 04 09 16 0355-032	326	244	162	75	129	1,116
355-40	PN 10-PN 16	2 04 09 16 0355-040	326	244	162	82	136	1,134
355-50	PN 10-PN 16	2 04 09 16 0355-050	373	261	162	100	160	1,435
355-63	PN 10-PN 16	2 04 09 16 0355-063	373	261	162	97	157	1,497
400-20	PN 10-PN 16	2 04 09 16 0400-020	349	267	162	76	129	1,206
400-25	PN 10-PN 16	2 04 09 16 0400-025	349	267	162	75	128	1,201
400-32	PN 10-PN 16	2 04 09 16 0400-032	349	267	162	75	129	1,198
400-40	PN 10-PN 16	2 04 09 16 0400-040	349	267	162	82	136	1,216
400-50	PN 10-PN 16	2 04 09 16 0400-050	396	284	162	100	160	1,518
400-63	PN 10-PN 16	2 04 09 16 0400-063	396	284	162	97	157	1,579

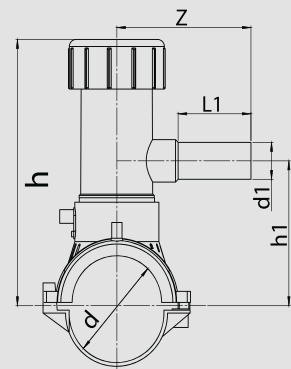

L=Length/Uzunluk

EF Vanalı Servis TE 360°

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Valve Tapping TEE 360°

EF Collier de Prise à Vanne 360°

ЭЛ. СВАРНОЕ СЕДЛО С ВЕНТИЛЕМ 360°

مربط تي 360 لحام كهربائي صمام خدماتي

Standard: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	h	h1	L	L1	Z	Net Ağırlık(kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d - d1								
63-20	PN 10-PN 16	2 04 09 16 0063-20V	244	110	161	75	130	1,497
63-25	PN 10-PN 16	2 04 09 16 0063-25V	244	110	161	75	130	1,507
63-32	PN 10-PN 16	2 04 09 16 0063-32V	244	110	161	75	130	1,517
63-40	PN 10-PN 16	2 04 09 16 0063-40V	244	110	161	97	153	1,613
63-50	PN 10-PN 16	2 04 09 16 0063-50V	244	110	161	97	153	1,623
63-63	PN 10-PN 16	2 04 09 16 0063-63V	244	110	161	97	153	1,633
75-20	PN 10-PN 16	2 04 09 16 0075-20V	250	115	161	75	130	1,633
75-25	PN 10-PN 16	2 04 09 16 0075-25V	250	115	161	75	130	1,643
75-32	PN 10-PN 16	2 04 09 16 0075-32V	250	115	161	75	130	1,653
75-40	PN 10-PN 16	2 04 09 16 0075-40V	250	115	161	97	153	1,704
75-50	PN 10-PN 16	2 04 09 16 0075-50V	250	115	161	97	153	1,714
75-63	PN 10-PN 16	2 04 09 16 0075-63V	250	115	161	97	153	1,724
90-20	PN 10-PN 16	2 04 09 16 0090-20V	258	123	161	75	130	1,559
90-25	PN 10-PN 16	2 04 09 16 0090-25V	258	123	161	75	130	1,569
90-32	PN 10-PN 16	2 04 09 16 0090-32V	258	123	161	75	130	1,579
90-40	PN 10-PN 16	2 04 09 16 0090-40V	258	123	161	97	153	1,675
90-50	PN 10-PN 16	2 04 09 16 0090-50V	258	123	161	97	153	1,685
90-63	PN 10-PN 16	2 04 09 16 0090-63V	258	123	161	97	153	1,695
110-20	PN 10-PN 16	2 04 09 16 0110-20V	268	133	161	75	130	1,674
110-25	PN 10-PN 16	2 04 09 16 0110-25V	268	133	161	75	130	1,684
110-32	PN 10-PN 16	2 04 09 16 0110-32V	268	133	161	75	130	1,694
110-40	PN 10-PN 16	2 04 09 16 0110-40V	268	133	161	97	153	1,790
110-50	PN 10-PN 16	2 04 09 16 0110-50V	268	133	161	97	153	1,800
110-63	PN 10-PN 16	2 04 09 16 0110-63V	268	133	161	97	153	1,810
125-20	PN 10-PN 16	2 04 09 16 0125-20V	275	140	161	75	130	1,645
125-25	PN 10-PN 16	2 04 09 16 0125-25V	275	140	161	75	130	1,655
125-32	PN 10-PN 16	2 04 09 16 0125-32V	275	140	161	75	130	1,665
125-40	PN 10-PN 16	2 04 09 16 0125-40V	275	140	161	97	153	1,761
125-50	PN 10-PN 16	2 04 09 16 0125-50V	275	140	161	97	153	1,771
125-63	PN 10-PN 16	2 04 09 16 0125-63V	275	140	161	97	153	1,781

EF Vanalı Servis TE 360°

PE 100 SDR 11(PN16) & SDR 17(PN10)

EF Valve Tapping TEE 360°


EF Collier de Prise à Vanne 360°

ЭЛ. СВАРНОЕ СЕДЛО С ВЕНТИЛЕМ 360°

مربط تي 360 لحام كهربي صمام خدماتي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1

Çap	Basınç	Kod No	h	h1	L	L1	Z	Net Ağırlık (kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d - d1								
140-20	PN 10-PN 16	2 04 09 16 0140-20V	283	148	161	75	130	1,629
140-25	PN 10-PN 16	2 04 09 16 0140-25V	283	148	161	75	130	1,639
140-32	PN 10-PN 16	2 04 09 16 0140-32V	283	148	161	75	130	1,649
140-40	PN 10-PN 16	2 04 09 16 0140-40V	283	148	161	97	153	1,745
140-50	PN 10-PN 16	2 04 09 16 0140-50V	283	148	161	97	153	1,755
140-63	PN 10-PN 16	2 04 09 16 0140-63V	283	148	161	97	153	1,765
160-20	PN 10-PN 16	2 04 09 16 0160-20V	293	158	161	75	130	1,607
160-25	PN 10-PN 16	2 04 09 16 0160-25V	293	158	161	75	130	1,617
160-32	PN 10-PN 16	2 04 09 16 0160-32V	293	158	161	75	130	1,627
160-40	PN 10-PN 16	2 04 09 16 0160-40V	293	158	161	97	153	1,723
160-50	PN 10-PN 16	2 04 09 16 0160-50V	293	158	161	97	153	1,733
160-63	PN 10-PN 16	2 04 09 16 0160-63V	293	158	161	97	153	1,743
180-20	PN 10-PN 16	2 04 09 16 0180-20V	303	168	162	75	130	1,746
180-25	PN 10-PN 16	2 04 09 16 0180-25V	303	168	162	75	130	1,756
180-32	PN 10-PN 16	2 04 09 16 0180-32V	303	168	162	75	130	1,766
180-40	PN 10-PN 16	2 04 09 16 0180-40V	303	168	162	97	153	1,862
180-50	PN 10-PN 16	2 04 09 16 0180-50V	303	168	162	97	153	1,872
180-63	PN 10-PN 16	2 04 09 16 0180-63V	303	168	162	97	153	1,882
200-20	PN 10-PN 16	2 04 09 16 0200-20V	313	178	162	75	130	1,736
200-25	PN 10-PN 16	2 04 09 16 0200-25V	313	178	162	75	130	1,746
200-32	PN 10-PN 16	2 04 09 16 0200-32V	313	178	162	75	130	1,756
200-40	PN 10-PN 16	2 04 09 16 0200-40V	313	178	162	97	153	1,852
200-50	PN 10-PN 16	2 04 09 16 0200-50V	313	178	162	97	153	1,862
200-63	PN 10-PN 16	2 04 09 16 0200-63V	313	178	162	97	153	1,872
225-20	PN 10-PN 16	2 04 09 16 0225-20V	325	190	162	75	130	1,745
225-25	PN 10-PN 16	2 04 09 16 0225-25V	325	190	162	75	130	1,755
225-32	PN 10-PN 16	2 04 09 16 0225-32V	325	190	162	75	130	1,765
225-40	PN 10-PN 16	2 04 09 16 0225-40V	325	190	162	97	153	1,861
225-50	PN 10-PN 16	2 04 09 16 0225-50V	325	190	162	97	153	1,871
225-63	PN 10-PN 16	2 04 09 16 0225-63V	325	190	162	97	153	1,881



EF Vanalı Servis TE 360°

PE 100 SDR 11(PN16) & SDR 17(PN10)


EF Valve Tapping TEE 360°

EF Collier de Prise à Vanne 360°

ЭЛ. СВАРНОЕ СЕДЛО С ВЕНТИЛЕМ 360°

مربط تي 360 لحام كهربائي صمام خدماتي

Standart: TS EN 1555-3:2010 + A1 • TS EN 12201-3 + A1



Çap	Basınç	Kod No	h	h1	L	L1	Z	Net Ağırlık(kg)
Size(mm)	Pressure(Bar)	Code No	(mm)	(mm)	(mm)	(mm)	(mm)	Weight (kg)
d - d1								
250-20	PN 10-PN 16	2 04 09 16 0250-20V	338	203	162	75	130	1,766
250-25	PN 10-PN 16	2 04 09 16 0250-25V	338	203	162	75	130	1,776
250-32	PN 10-PN 16	2 04 09 16 0250-32V	338	203	162	75	130	1,786
250-40	PN 10-PN 16	2 04 09 16 0250-40V	338	203	162	97	153	1,882
250-50	PN 10-PN 16	2 04 09 16 0250-50V	338	203	162	97	153	1,892
250-63	PN 10-PN 16	2 04 09 16 0250-63V	338	203	162	97	153	1,902
280-20	PN 10-PN 16	2 04 09 16 0280-20V	353	218	162	75	130	1,810
280-25	PN 10-PN 16	2 04 09 16 0280-25V	353	218	162	75	130	1,820
280-32	PN 10-PN 16	2 04 09 16 0280-32V	353	218	162	75	130	1,830
280-40	PN 10-PN 16	2 04 09 16 0280-40V	353	218	162	97	153	1,926
280-50	PN 10-PN 16	2 04 09 16 0280-50V	353	218	162	97	153	1,936
280-63	PN 10-PN 16	2 04 09 16 0280-63V	353	218	162	97	153	1,946
315-20	PN 10-PN 16	2 04 09 16 0315-20V	370	235	162	75	130	1,837
315-25	PN 10-PN 16	2 04 09 16 0315-25V	370	235	162	75	130	1,847
315-32	PN 10-PN 16	2 04 09 16 0315-32V	370	235	162	75	130	1,857
315-40	PN 10-PN 16	2 04 09 16 0315-40V	370	235	162	97	153	1,953
315-50	PN 10-PN 16	2 04 09 16 0315-50V	370	235	162	97	153	1,963
315-63	PN 10-PN 16	2 04 09 16 0315-63V	370	235	162	97	153	1,973
355-20	PN 10-PN 16	2 04 09 16 0355-20V	390	255	162	75	130	1,912
355-25	PN 10-PN 16	2 04 09 16 0355-25V	390	255	162	75	130	1,922
355-32	PN 10-PN 16	2 04 09 16 0355-32V	390	255	162	75	130	1,932
355-40	PN 10-PN 16	2 04 09 16 0355-40V	390	255	162	97	153	2,028
355-50	PN 10-PN 16	2 04 09 16 0355-50V	390	255	162	97	153	2,038
355-63	PN 10-PN 16	2 04 09 16 0355-63V	390	255	162	97	153	2,048
400-20	PN 10-PN 16	2 04 09 16 0400-20V	413	278	162	75	130	1,992
400-25	PN 10-PN 16	2 04 09 16 0400-25V	413	278	162	75	130	2,002
400-32	PN 10-PN 16	2 04 09 16 0400-32V	413	278	162	75	130	2,012
400-40	PN 10-PN 16	2 04 09 16 0400-40V	413	278	162	97	153	2,108
400-50	PN 10-PN 16	2 04 09 16 0400-50V	413	278	162	97	153	2,118
400-63	PN 10-PN 16	2 04 09 16 0400-63V	413	278	162	97	153	2,128